


# HYDROSYSTEM 46 HV Cod. 2709

## DESCRIPTION

High viscosity index oil for high-pressure hydraulic and hydrostatic systems, agricultural machinery in general and earth moving machines.

## CHARACTERISTICS

- | High anti-wear properties for a longer life of the hydraulic circuit.
- | Excellent anti-oxidant characteristics for a longer lubricant life.
- | Good anti-foaming and demulsifying properties providing maximum lubrication continuity and optimum heat exchange.
- | High viscosity index for optimising servo control equipment response in any operating temperature conditions.
- | Excellent anti-rust properties ensuring the maximum protection for the system components from the effects of dampness or humidity.

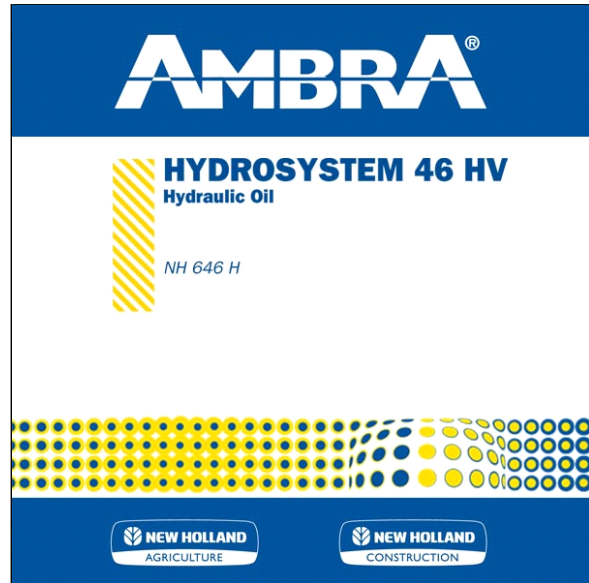

## ADVICE ON USE

- Hydrosystem 46 HV is usable in environmental temperatures from -20C a +40C. This product helps to eliminate starting problems in cold climates and problems with wear and tear in warm climates.
- Replacement process in accordance with Manufacturer's indications.

## TECHNICAL DATA

NH 646 H, ISO VG 46, DIN 51524 HVLP 46